



Drawing: K:\CLIENTS\LANCASTER\STANDARDS\DWGS\7.dwg Plotted: Jun 07, 2007 - 4:11pm

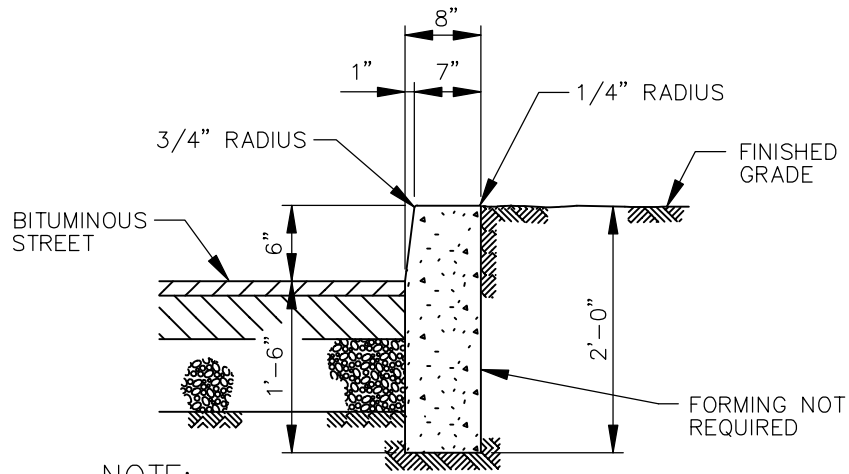

NOTE:

CURB TO BE CONSTRUCTED WITH CLASS 'A' CONCRETE WITH EXPANSION JOINTS SPACED AT 16'-0" MAXIMUM.

CONCRETE CURB SECTION

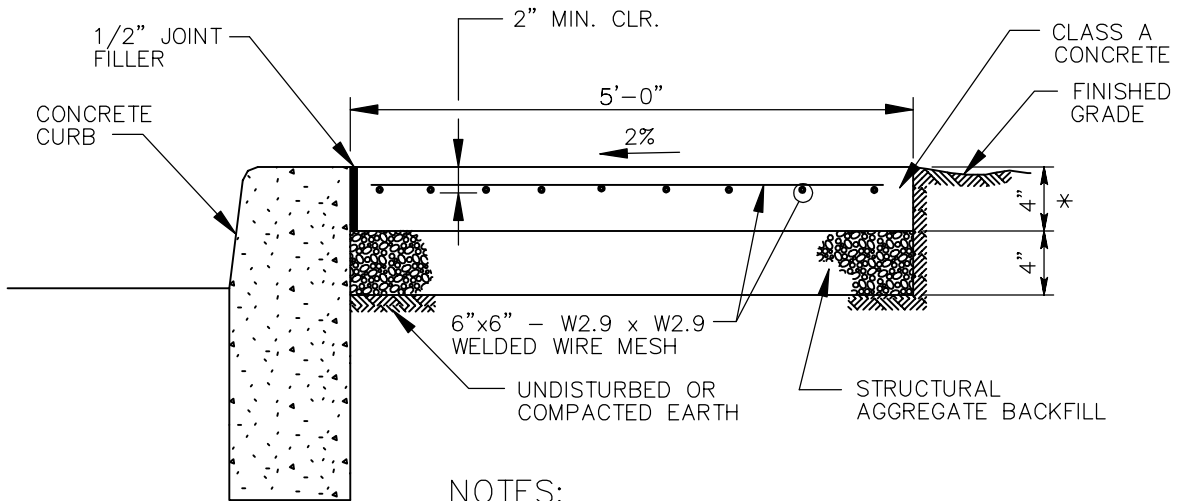

NOTES:

1. EXPANSION JOINTS LOCATED AT 16' C/C.
2. TOOLED JOINTS LOCATED AT 4' C/C.
3. SIDEWALK SHALL BE LIGHT BROOM FINISHED IN THE DIRECTION OF SIDEWALK WIDTH.
4. IN DRIVEWAY AREAS SIDEWALK SHALL BE 6" THICK.

SIDEWALK SECTION AT CURB

SCALE: NONE

CONCRETE CURB & SIDEWALK SECTIONS

NO.	DATE	NO.	DATE
REVISIONS		REVISIONS	
		1	MARCH 2014
		ORIGINAL	JANUARY 2007

SHEET NO.

7